



ABSOLUTE
PRECISION



PORTABLE DRILL RIGS

inGetrol



Since 1990, Ingetrol Group is a world leader in the development of portable and versatile drilling rigs, having developed more than 450 types of equipment used for various purposes in 43 countries.

PORTABLE SURFACE DRILL RIGS FOR CORE DRILLING

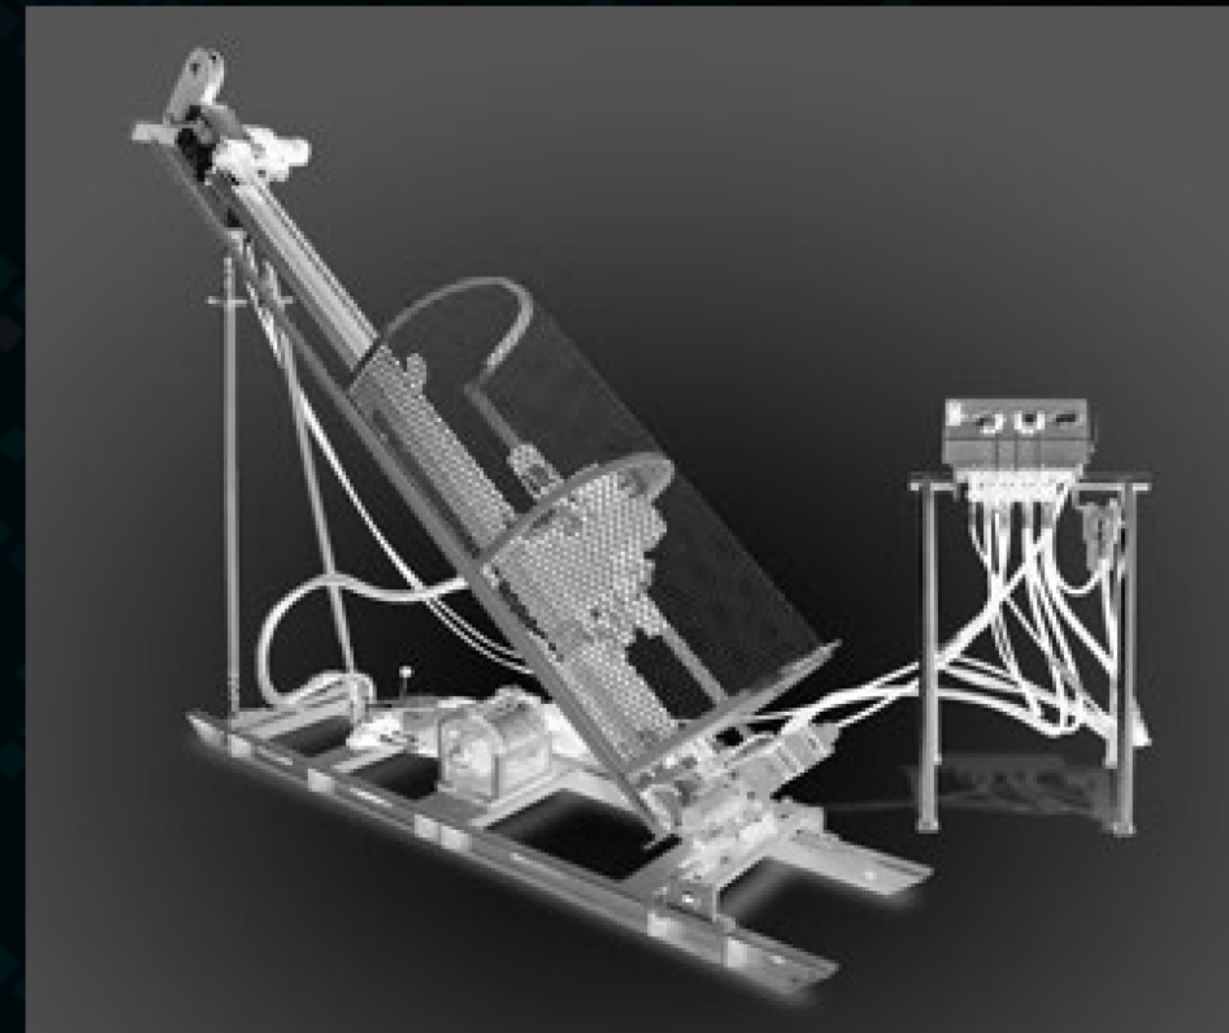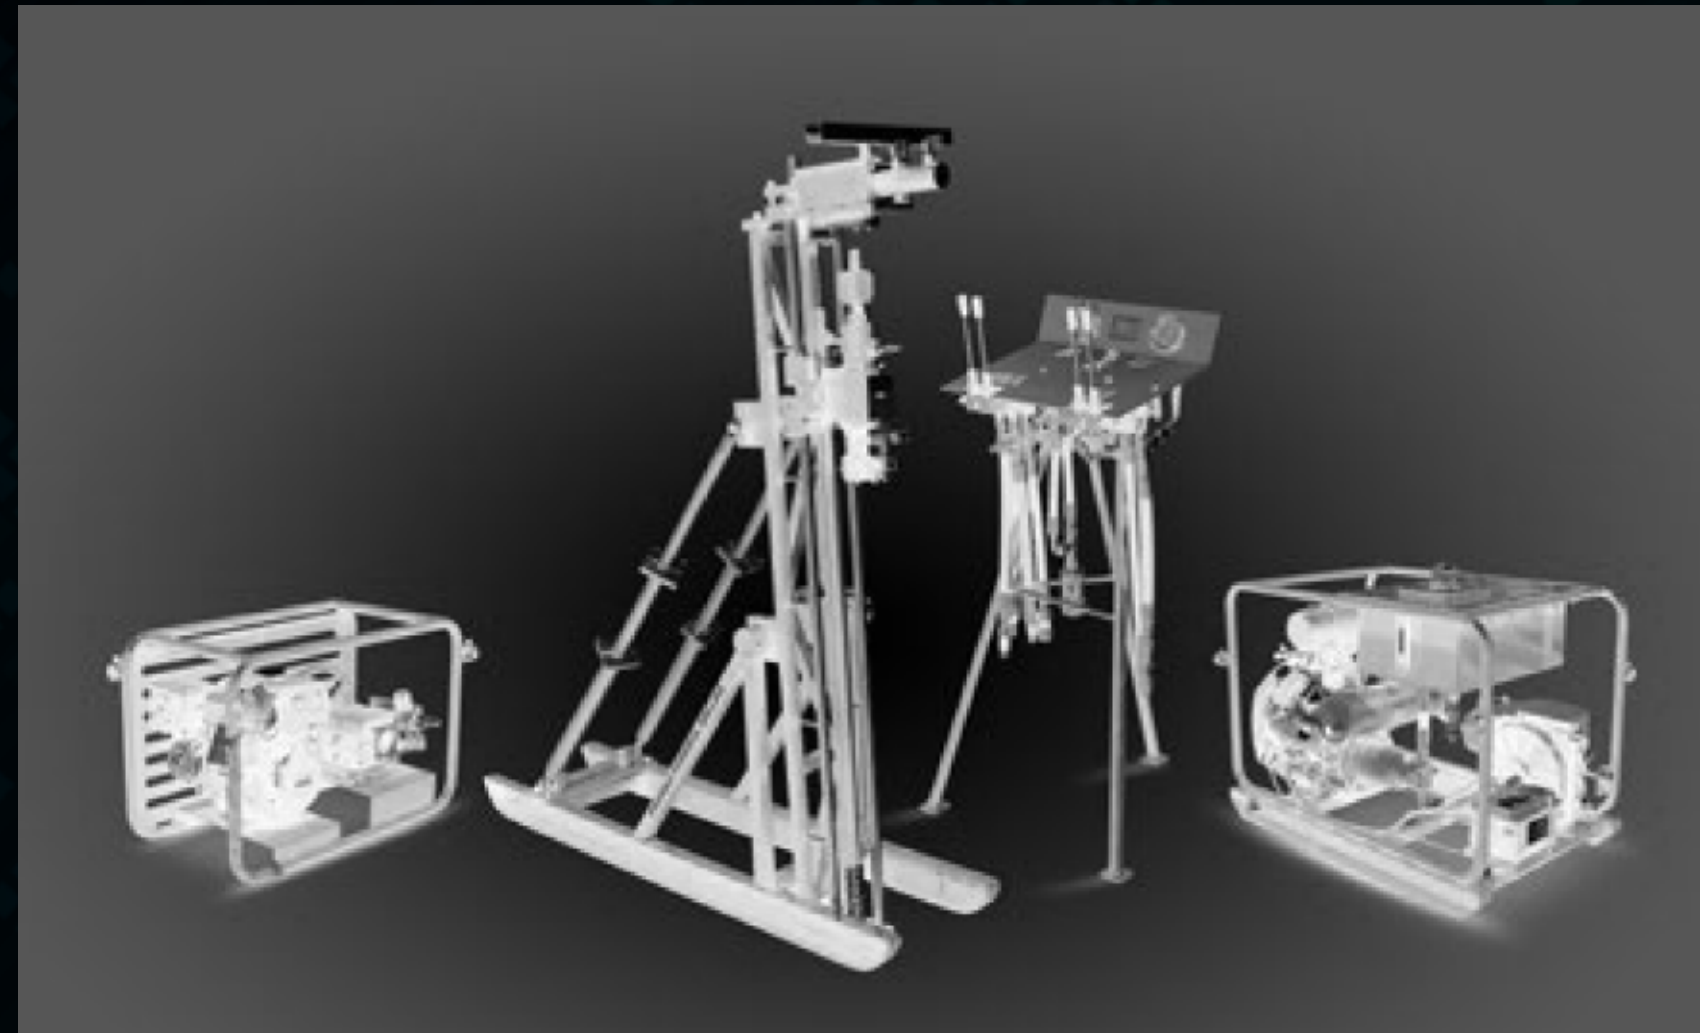


- Portability
- Versatility
- High efficiency
- Easy to use in remote areas and confined spaces
- Low cost
- Heliportable

PORTABLE SURFACE DRILL RIGS FOR DIAMOND DRILLING



ULTRA 25G

TT46: 70 m / 230 ft. Ø 35 mm / Ø 1.377"

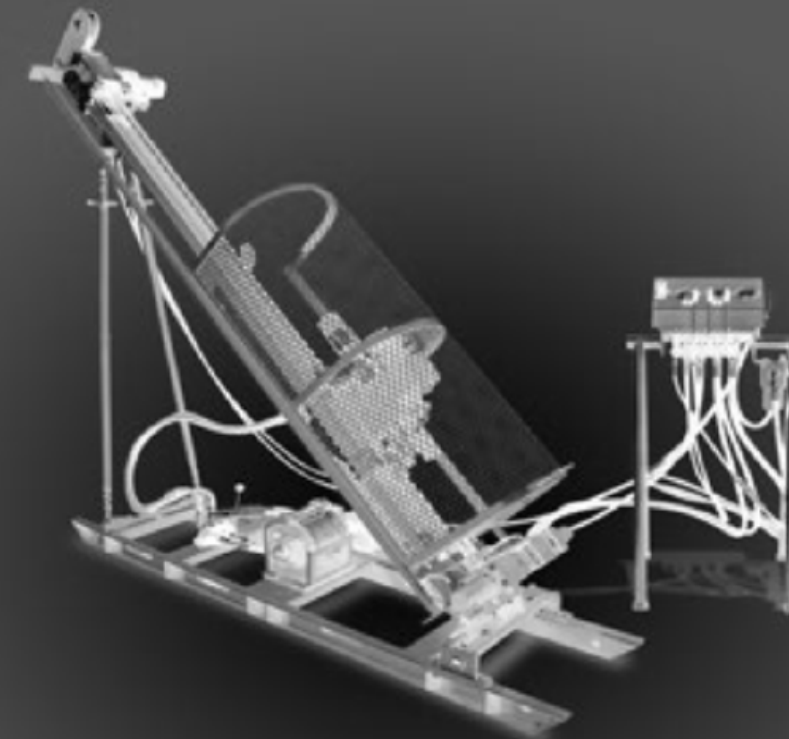

SANDY 40G

TT46: 120 m / 393 ft. Ø 35 mm / Ø 1.377"
BWL: 100 m / 328 ft. Ø 36.5 mm / Ø 1.432"




EXPLORER JR 72D

BWL: 280 m / 918 ft. Ø 36.5 mm / Ø 1.432"
NWL: 130 m / 426 ft. Ø 47.6 mm / Ø 1.875"



EXPLORER MD1

BWL: 350 m / 1148 ft. Ø 36.5 mm / Ø 1.432"
NWL: 250 m / 820 ft. Ø 47.6 mm / Ø 1.875"
HWL: 120 m / 393 ft. Ø 63.5 mm / Ø 2.500"

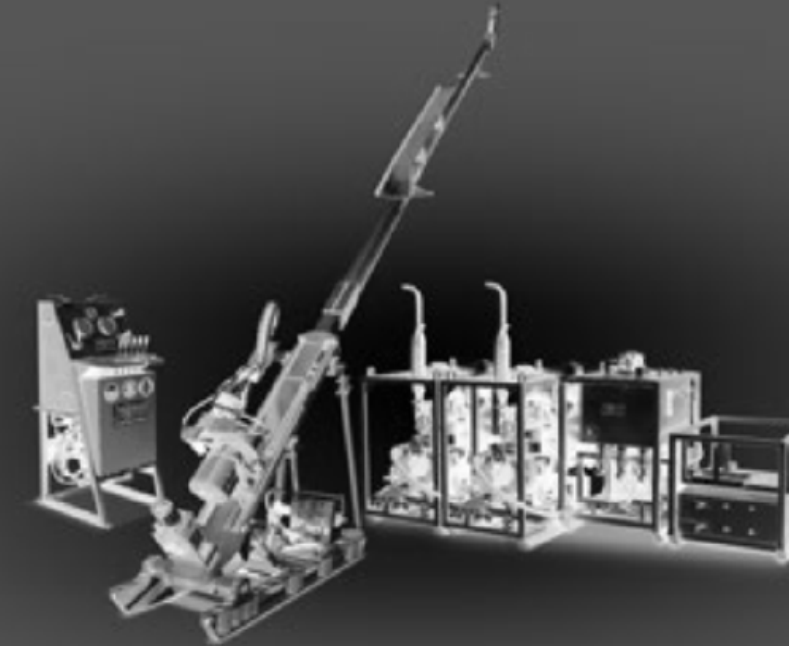

EXPLORER MD2

BWL: 950 m / 3116 ft. Ø 36.5 mm / Ø 1.432"
NWL: 800 m / 2624 ft. Ø 47.6 mm / Ø 1.875"
HWL: 600 m / 1968 ft. Ø 63.5 mm / Ø 2.500"

SURFACE DRILL RIGS FOR DEEP DRILLING



EXPLORER 1000D

BWL: 1200 m / 3937 ft. Ø 36.5 mm / Ø 1.432"

NWL: 950 m / 3116 ft. Ø 47.6 mm / Ø 1.875"

HWL: 600 m / 1968 ft. Ø 63.5 mm / Ø 2.500"



EXPLORER 1500D

NWL: 1100 m / 3609 ft. Ø 47.6 mm / Ø 1.875"

HWL: 800 m / 2624 ft. Ø 63.5 mm / Ø 2.500"

PWL: 400 m / 1312 ft. Ø 85 mm / Ø 3.345"




EXPLORER 2500D

NWL: 1300 m / 4265 ft. Ø 47.6 mm / Ø 1.875"

HWL: 1000 m / 3280 ft. Ø 63.5 mm / Ø 2.500"


PWL: 700 m / 2296 ft. Ø 85 mm / Ø 3.345"

UNDERGROUND DIAMOND DRILLING RIGS

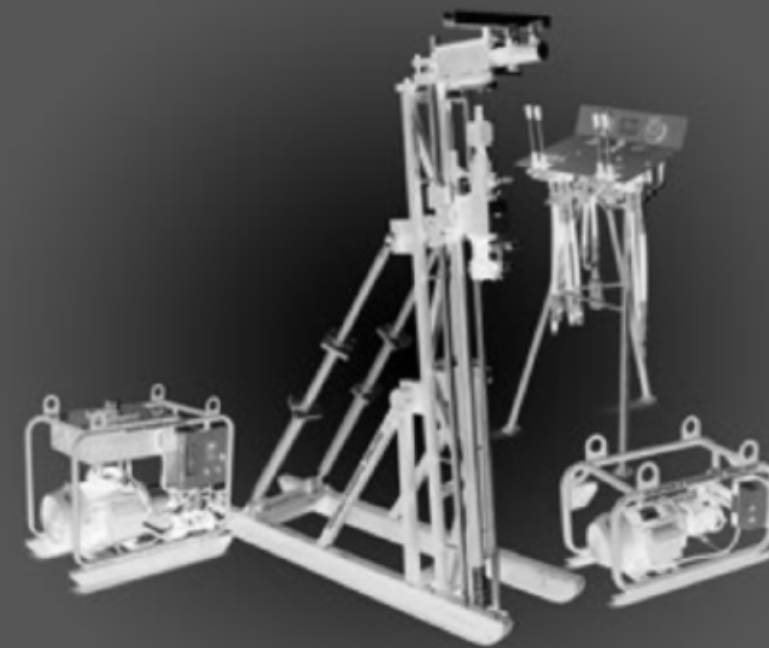

ULTRA 20E

TT46: 70 m / 230 ft. Ø 35 mm / Ø1.377"

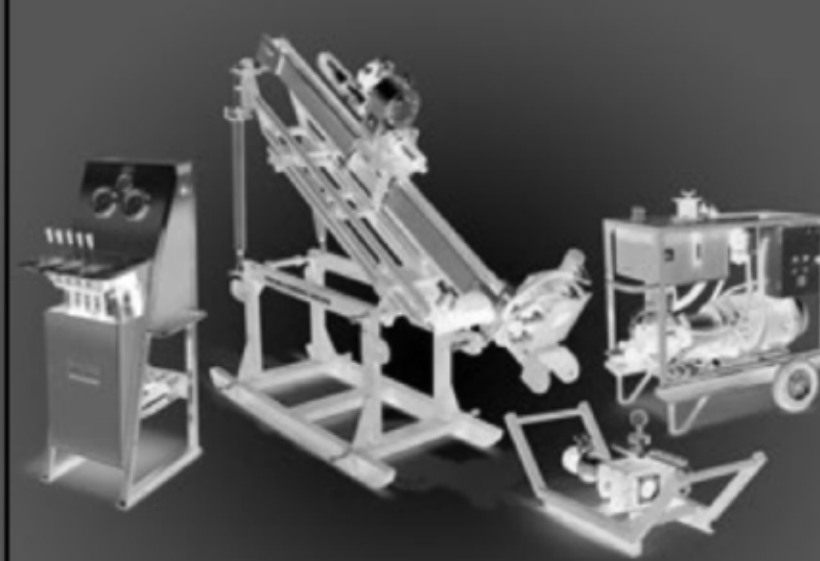

SANDY 30E

TT46: 150 m / 492 ft. Ø 35 mm / Ø1.377"
BWL: 120 m / 393 ft. Ø 36.5 mm / Ø 1.432"




SANDY 50E

BWL: 250 m / 820 ft. Ø 36.5 mm / Ø 1.432"
NWL: 150 m / 492 ft. Ø 47.6 mm / Ø 1.875"



EXPLORER 75E


BWL: 550 m / 1804 ft. Ø 36.5 mm / Ø 1.432"
NWL: 430 m / 1410 ft. Ø 47.6 mm / Ø 1.875"
HWL: 200 m / 656 ft. Ø 63.5 mm / Ø 2.500"

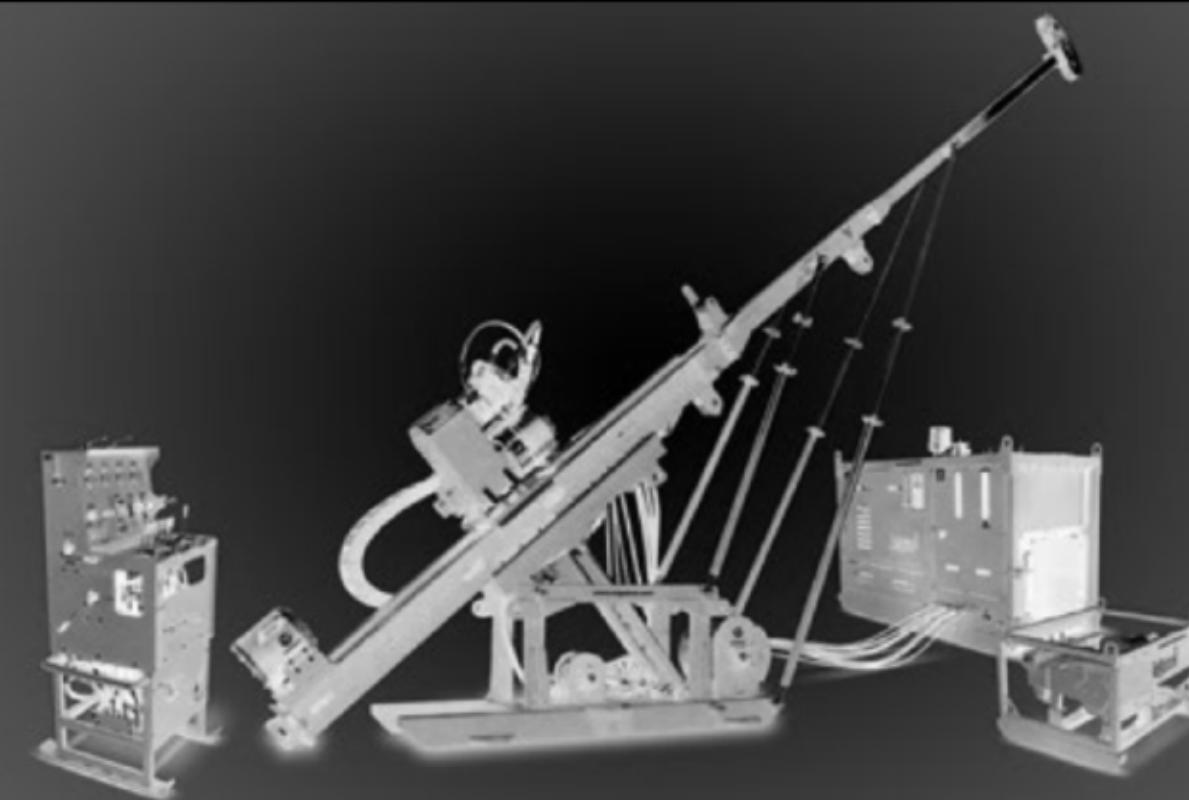

EXPLORER 1000E

BWL: 1150 m / 3773 ft. Ø 36.5 mm / Ø 1.432"
NWL: 900 m / 2952 ft. Ø 47.6 mm / Ø 1.875"
HWL: 480 m / 1574 ft. Ø 63.5 mm / Ø 2.500"

UNDERGROUND DRILL RIGS FOR DEEP DRILLING

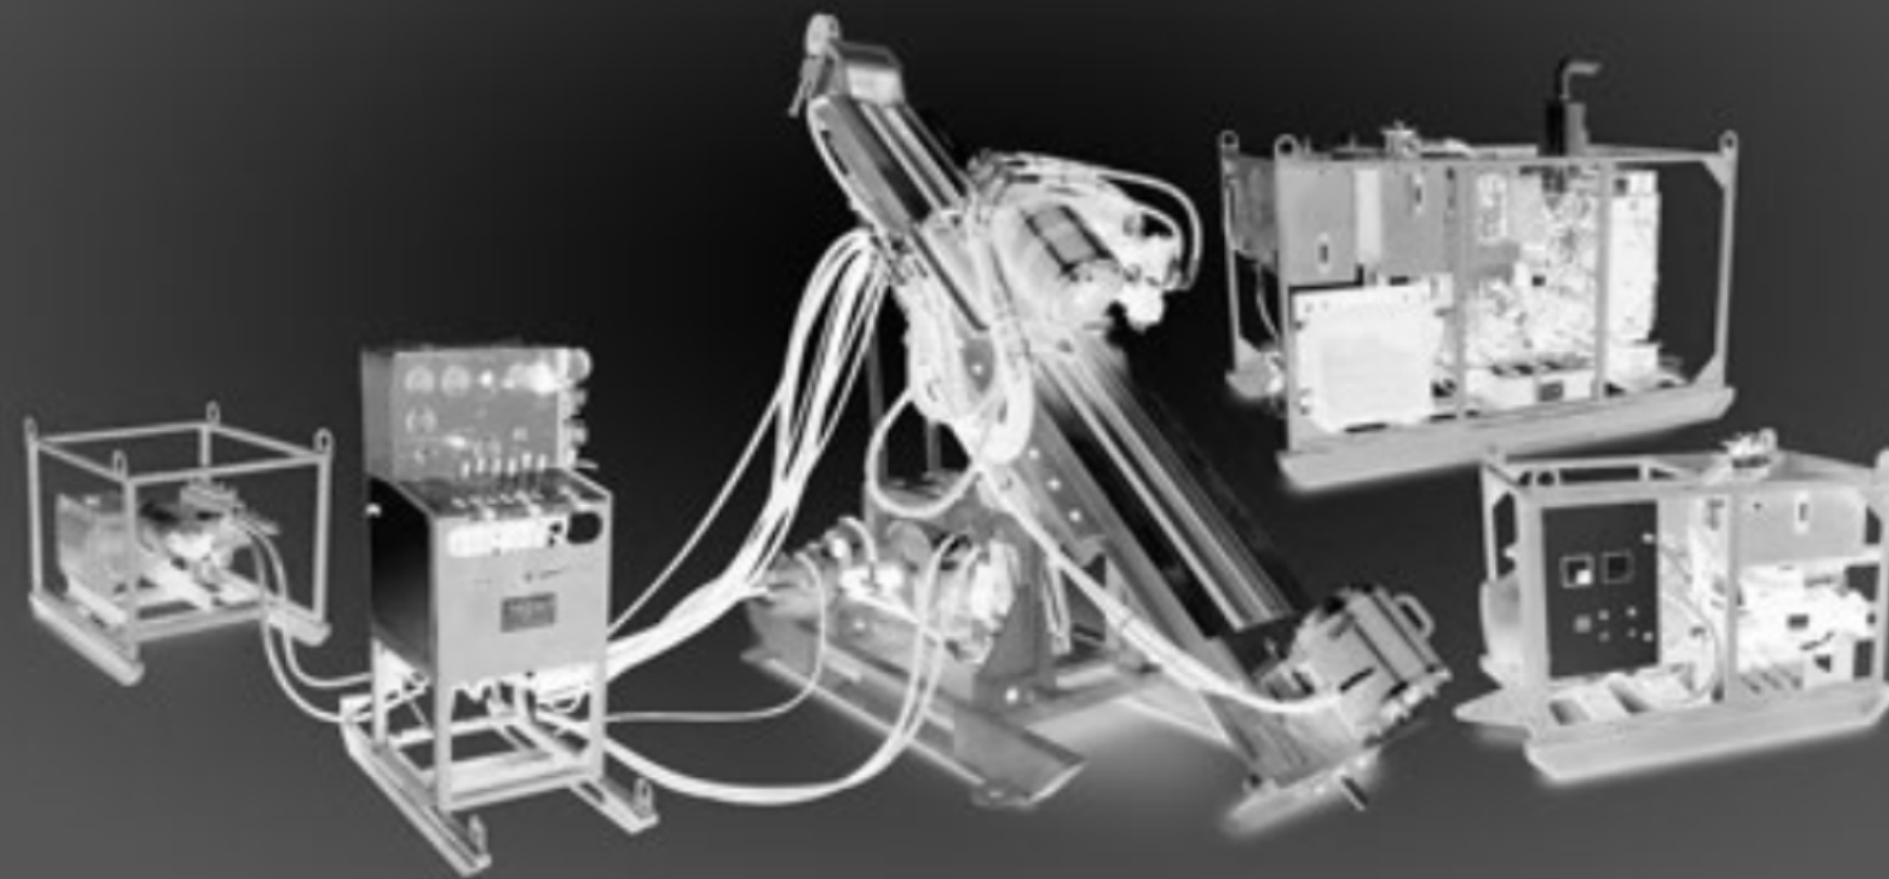

EXPLORER 1500E

NWL: 1100 m / 3609 ft. Ø 47.6 mm / Ø 1.875"

HWL: 650 m / 2132 ft. Ø 63.5 mm / Ø 2.500"

PWL: 400 m / 1312 ft. Ø 85 mm / Ø 3.345"

EXPLORER 2500E

NWL: 1300 m / 4265 ft. Ø 47.6 mm / Ø 1.875"

HWL: 750 m / 2460 ft. Ø 63.5 mm / Ø 2.500"

PWL: 500 m / 1640 ft. Ø 85 mm / Ø 3.345"



DTH DRILLING RIGS

APPLICATIONS:


- ⦿ Chip sampling
- ⦿ Pre-wells
- ⦿ Anchors
- ⦿ Holes for blasting




GEOTECHNICAL DRILLING RIGS

APPLICATIONS:

- Soil sampling
- Tailings Evaluation
- SPT
- CPT-U

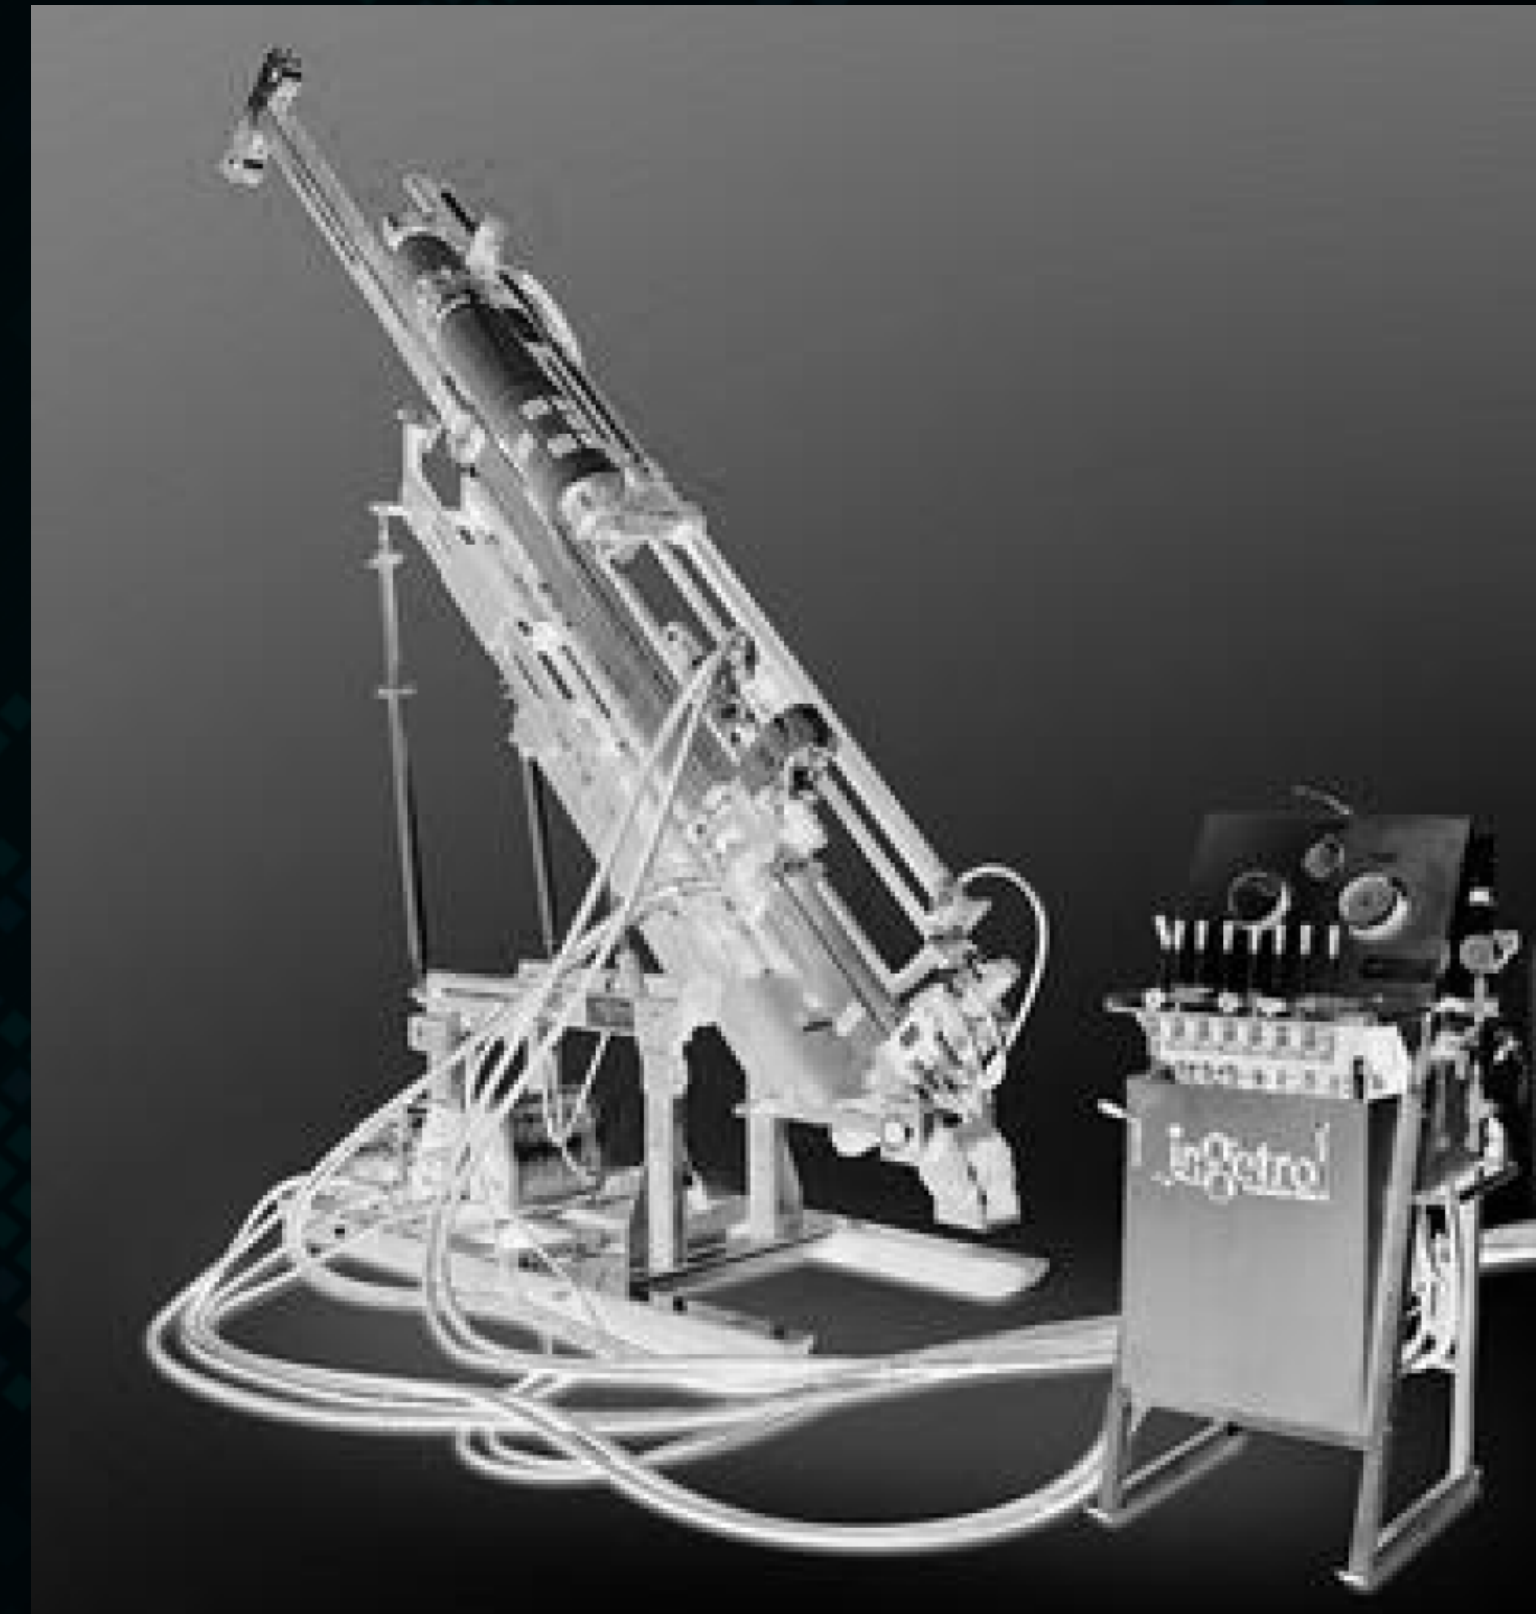


DRILLING ATTACHMENTS

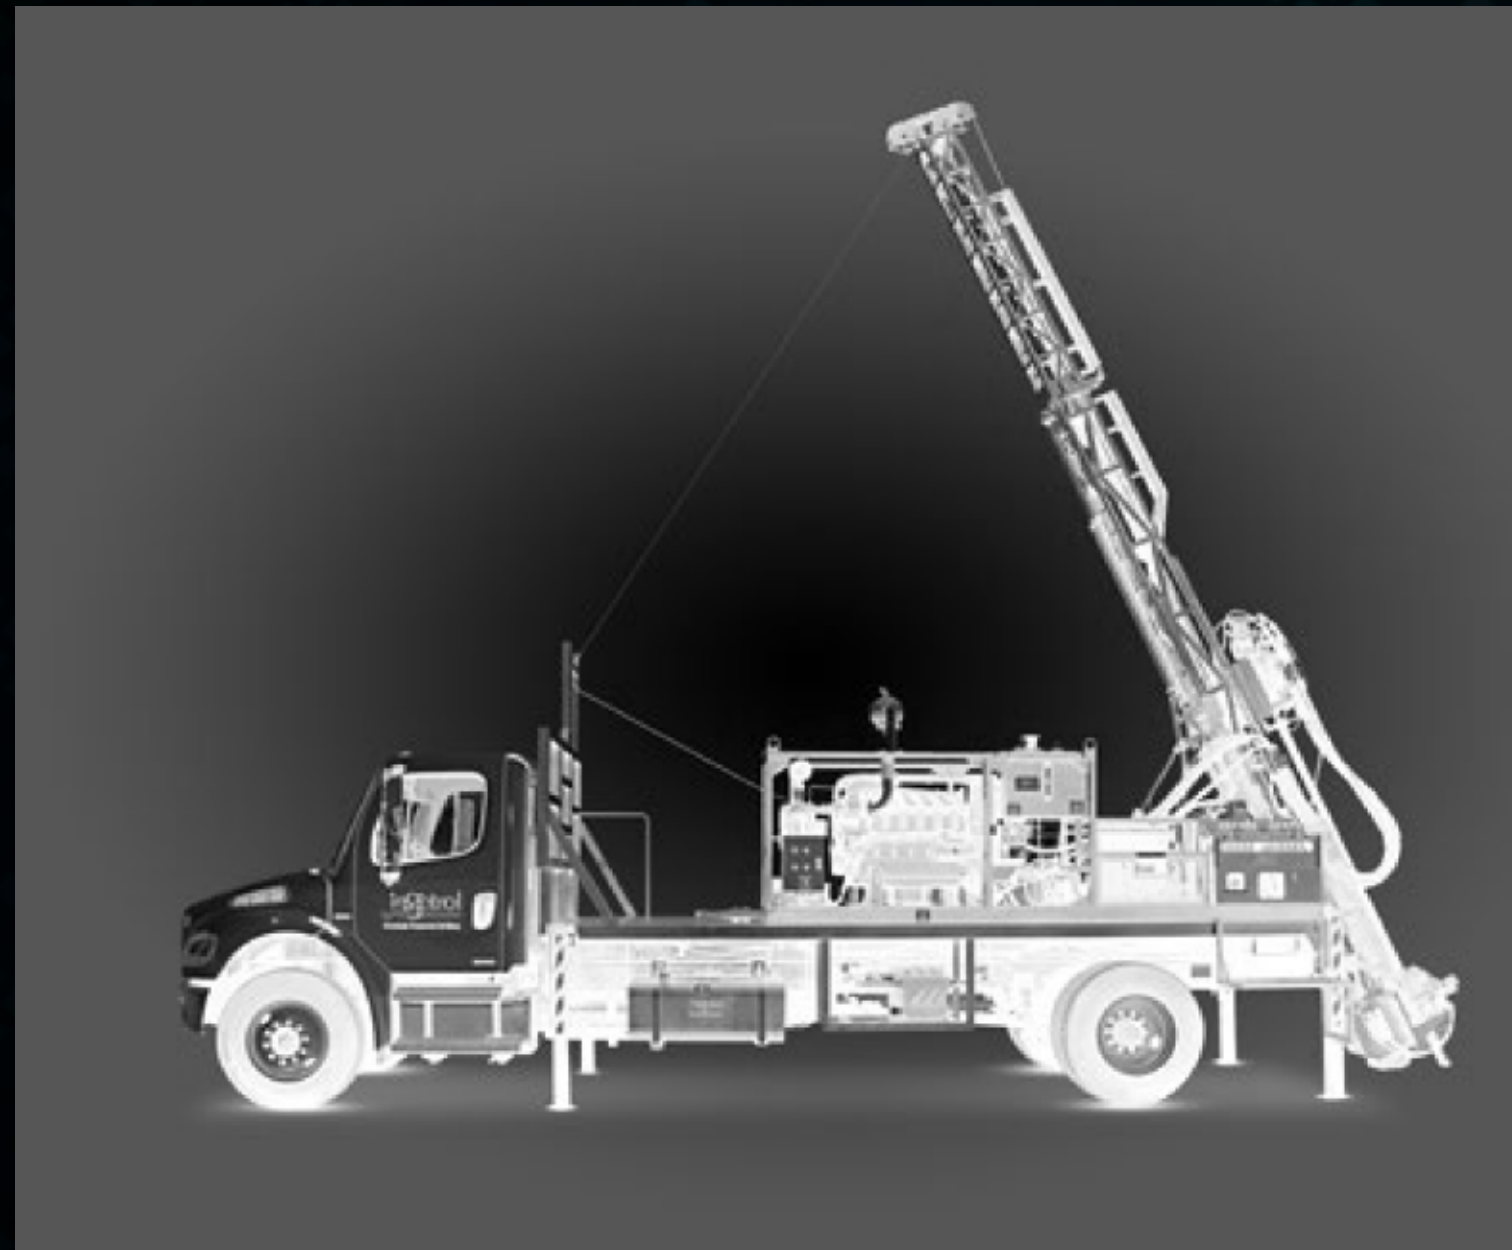

TRUCK




CRAWLER

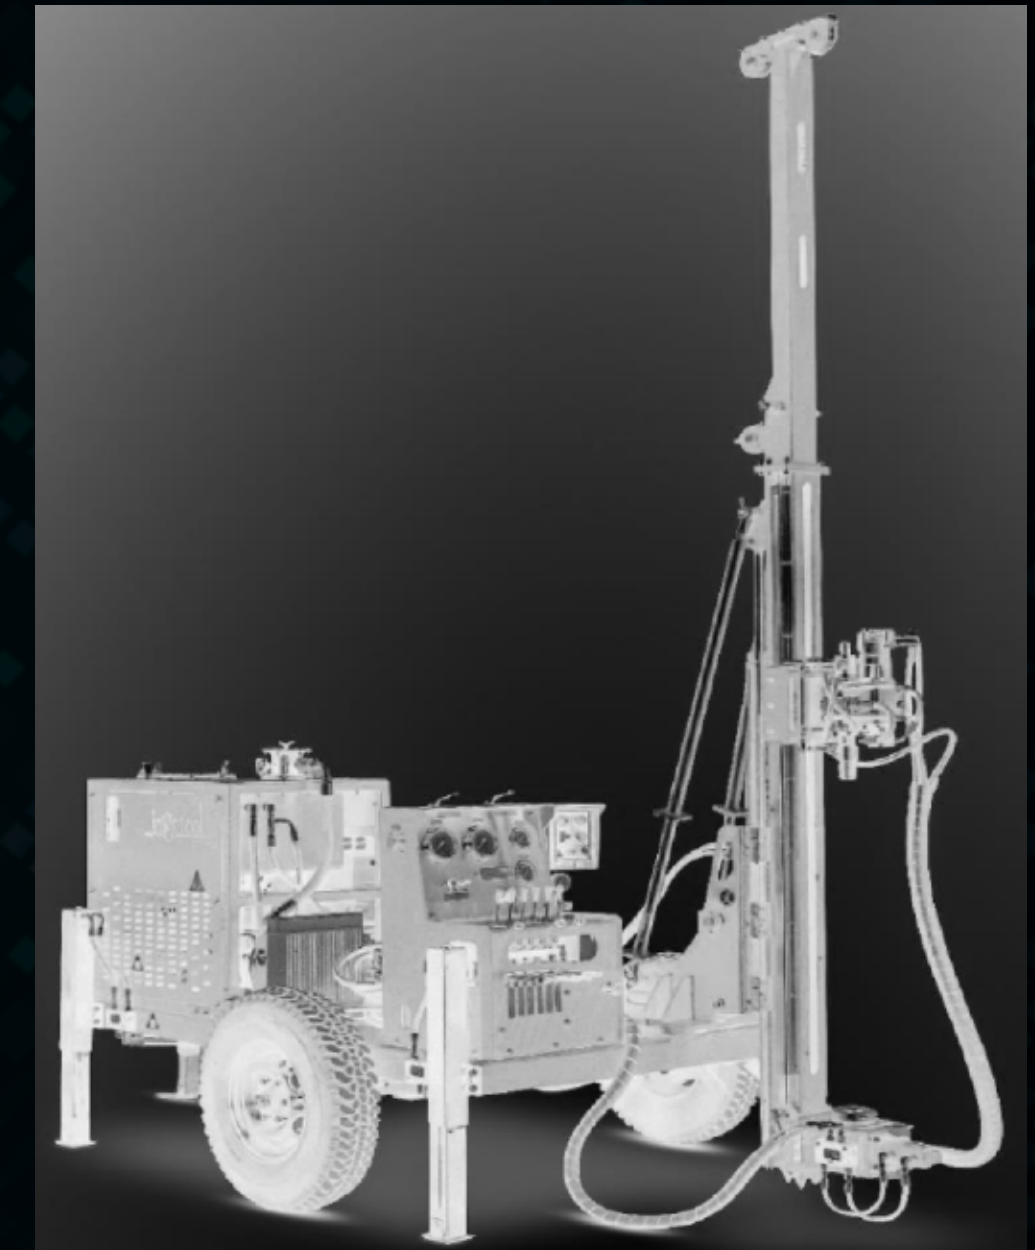

TRAILER

HIGHLY SPECIALIZED DRILLING ACCESSORIES

Designing and manufacturing of drilling tools for mining, geotechnical and construction

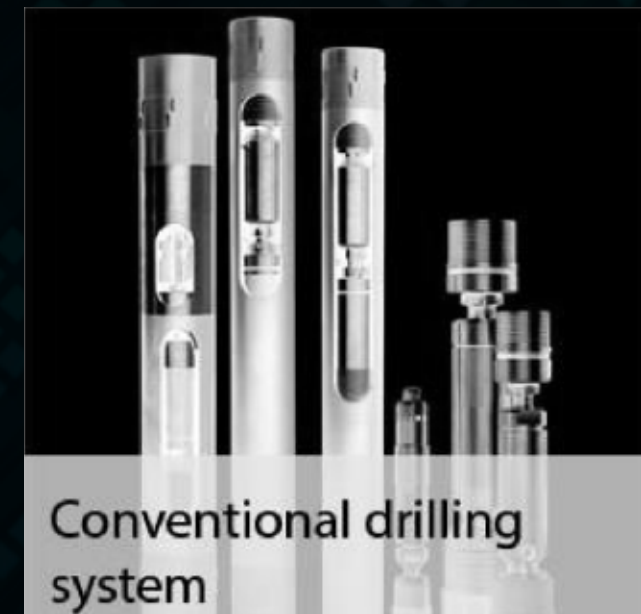

Conventional drilling system




Drilling accessories



Drill rods and casings



Wire Line drilling system

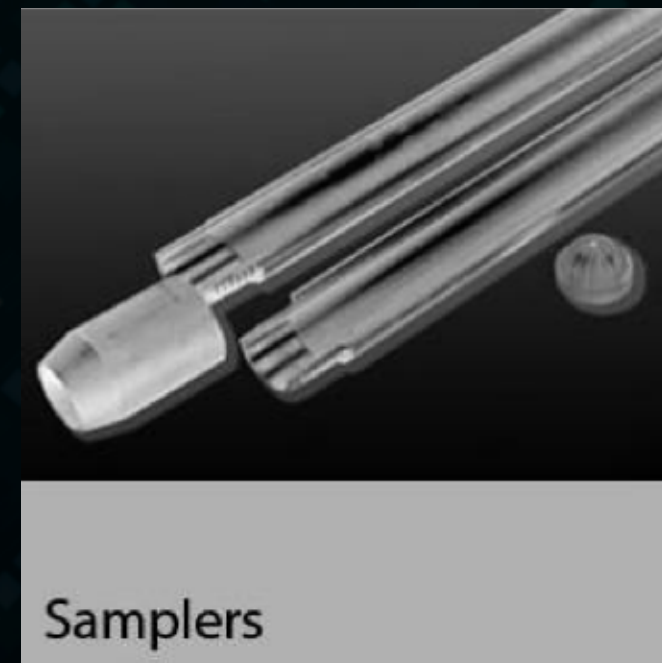

Samplers



Diamond and Carbotec core Bits

INGETROL MAKES THE DIFFERENCE

- Lightest power packs - 72 hp only 300 kg
- Next generation mud pumps (more flow, higher pressure and lighter weight, triplex ball valve mud pump)
- Special compact geotechnical rigs for soil sampling, tailings evaluation, spt, cpt-u
- Fully remote control track mounted hq core drill for underground exploration
- Special dedicated rigs for geomechanics applications like overcoring, etc
- Drill rods with extra resistance specially for directional drilling applications

